

Specifications sheet

MILI LIFELINE

Micro linear luminaire



EKLIPSE
ARCHITECTURAL LIGHTING



MILI can be perfectly embedded in the retail furniture, such as display shelves, to be basically invisible to the observer. With its miniaturized dimensions and perfect light distribution, MILI revolutionizes shelf illumination. MILI is held in place with magnets in the LIFELINE tracklight. All fixtures can be easily repositioned in the system when required.

Electrical

Power output

Available in 4W/ft and 6W/ft (13W/m and 20W/m).

Remote Power Supply

24V: Eklipse™ PSB-24-100.

Dimming Power Supply

24V: Eklipse™ LM-24-100.

Connectivity

Compatible with LIFELINE track system.

Thermal control

Through constant thermal monitoring and current control, Eklipse™ intelligent board technology (IBT) maintains optimal light levels and operating temperature preventing harmful overheating by self adjusting to its environment.

Physical

Construction

High precision thin walled aluminium extrusion. PET film.

Finish *

Anodized clear. Anodized black.

Operating temperature

The temperature should be measured at 3 inches from the light source.



0° ~ 40°

Standards compliance

Approved RoHS, CSA/UL and CE.



Light

Light source

Mid power LEDs.

Light temperature *

2200K, 2400K, 2700K, 3000K, 3500K, 4000K.

CRI

80 (minimum), 90 (minimum).

Film

Integrated frosted film.

Interior / Dry location only



Mates with LIFELINE®



Asymmetric light distribution




IP40

CLASS 2
PRODUCT

24V - 100W MAX

* Available for tailor-made application. Please contact your Eklipse™ representative for further informations.

Dimensions

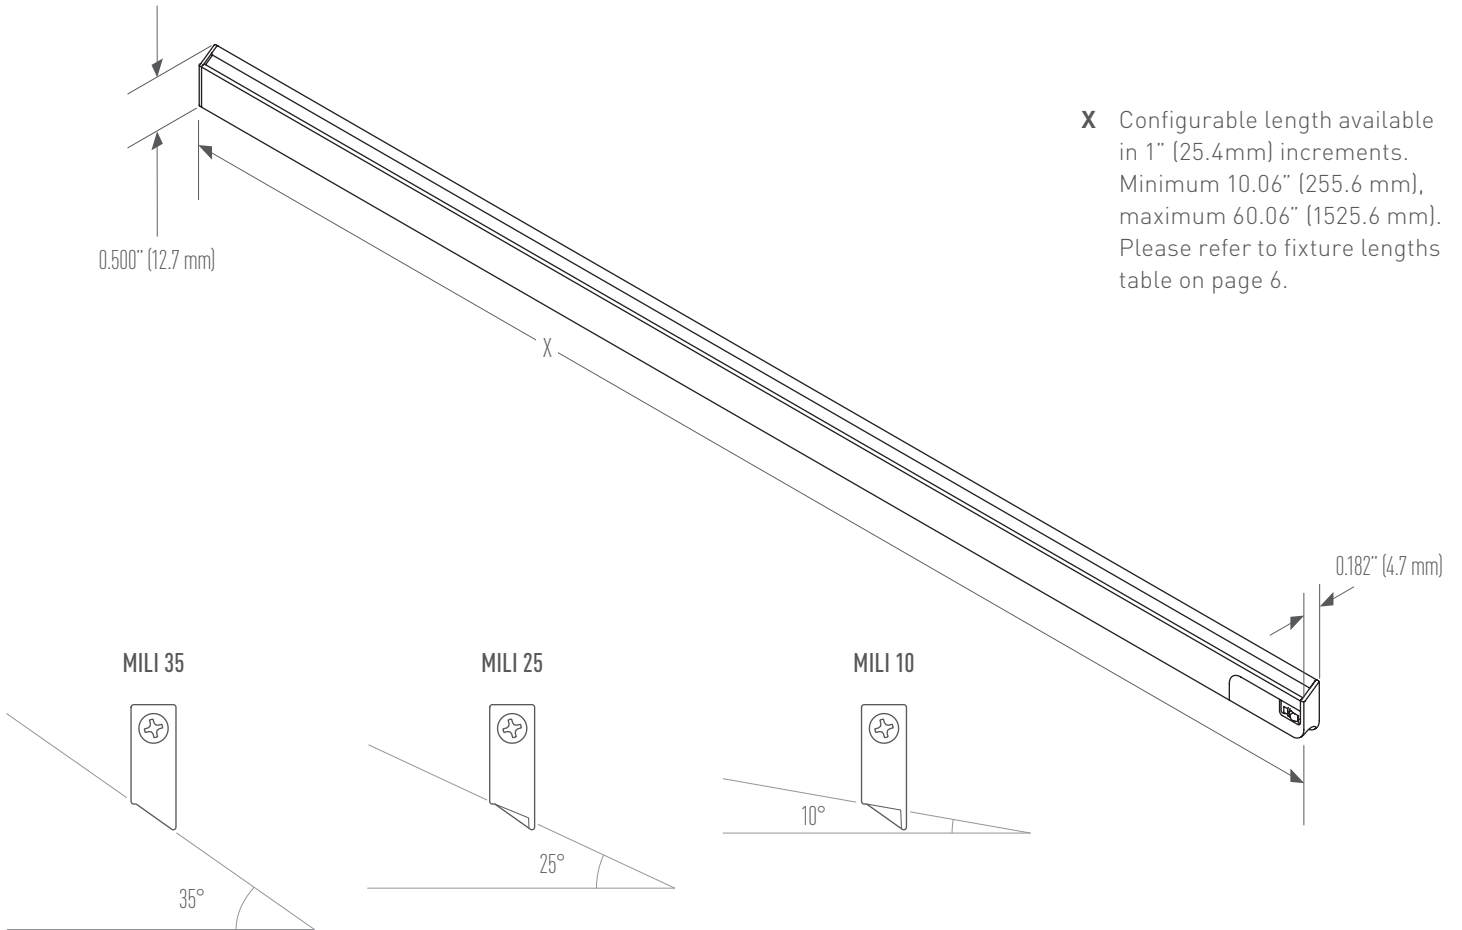

X Configurable length available in 1" (25.4mm) increments. Minimum 10.06" (255.6 mm), maximum 60.06" (1525.6 mm). Please refer to fixture lengths table on page 6.


Light resolution

High resolution





Uniform light appearance.

Mounting

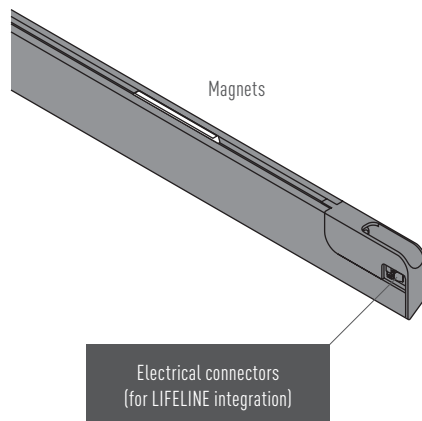

Design concept

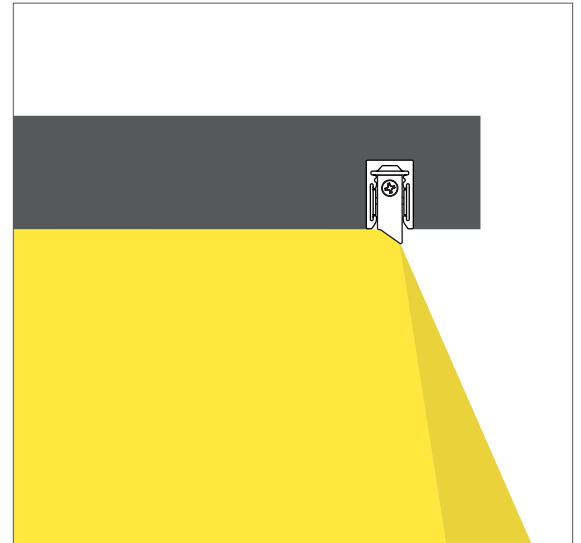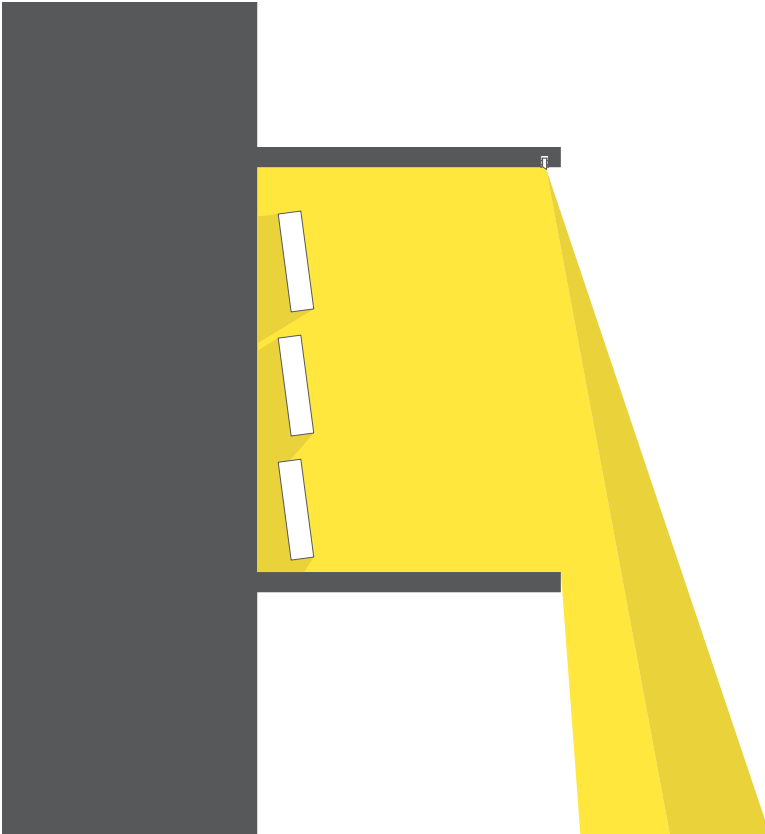



Optimized light distribution

MILI®, with its display spaces to the very top, without projecting any shadow. is imperceptible once integrated in the shelf. It illuminates homogeneously the

Insertion

LIFELINE

MILI LIFELINE holds in place with magnets.

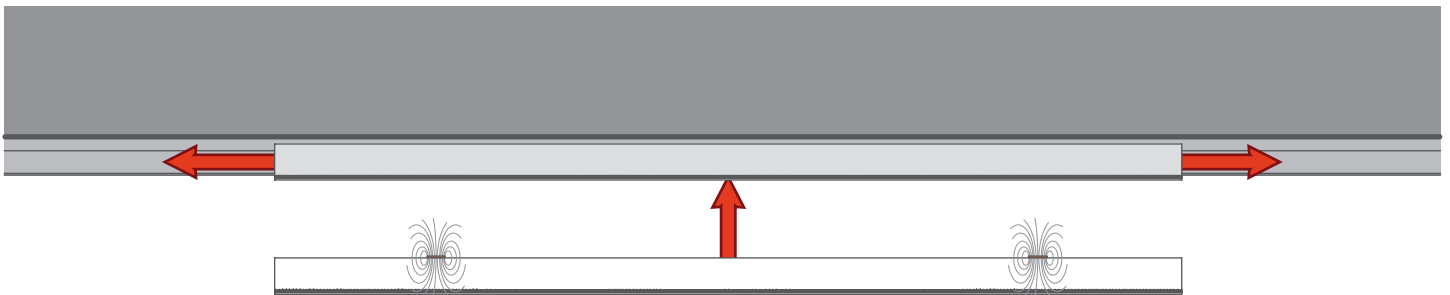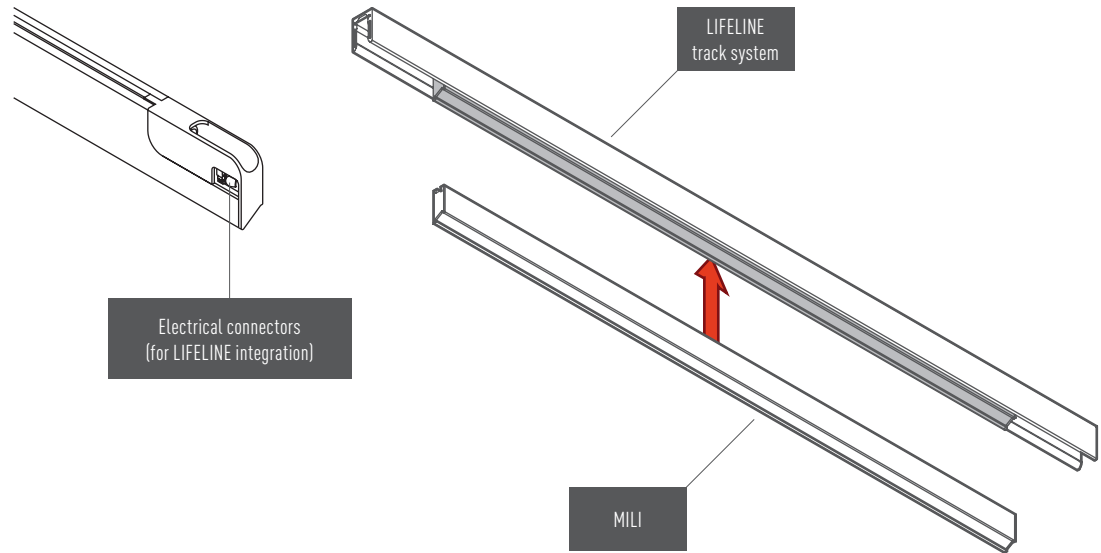


MILI LIFELINE can be plugged and unplugged without turning the power off.

Available fixture lengths

Imperial Metric

inches	mm	inches	mm	inches	mm
10.060	255.6	30.060	763.6	50.060	1271.6
11.060	281.0	31.060	789.0	51.060	1297.0
12.060	306.4	32.060	814.4	52.060	1322.4
13.060	331.8	33.060	839.8	53.060	1347.8
14.060	357.2	34.060	865.2	54.060	1373.2
15.060	382.6	35.060	890.6	55.060	1398.6
16.060	408.0	36.060	916.0	56.060	1424.0
17.060	433.4	37.060	941.4	57.060	1449.4
18.060	458.8	38.060	966.8	58.060	1474.8
19.060	484.2	39.060	992.2	59.060	1500.2
20.060	509.6	40.060	1017.6	60.060	1525.6
21.060	535.0	41.060	1043.0		
22.060	560.4	42.060	1068.4		
23.060	585.8	43.060	1093.8		
24.060	611.2	44.060	1119.2		
25.060	636.6	45.060	1144.6		
26.060	662.0	46.060	1170.0		
27.060	687.4	47.060	1195.4		
28.060	712.8	48.060	1220.8		
29.060	738.2	49.060	1246.2		

Ordering code model

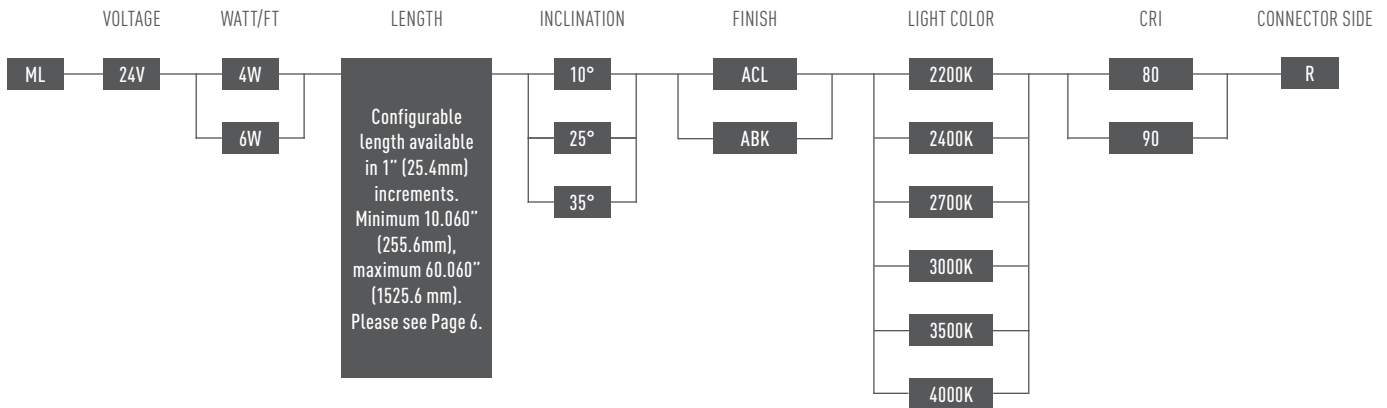

Warranty

Our products and relative parts are guaranteed for **three (3)** years.

See our terms and conditions on www.eklipselighting.com





EKLIPSE

ARCHITECTURAL LIGHTING

Specifications may vary, without altering or reducing product performance.

All information on this document are the sole property of Eklipse™ Architectural Lighting inc.

Reproduction of this document, in whole or in part, without written permission is illegal.

2090 rue Moreau
Suite 100
Montréal, QC - H1W 2M3
Canada

T +1 514 590 0099
F +1 514 590 0098
INT 1 877 590 0098

sales@eklipseighting.com
www.eklipseighting.com